

BAT TERY OPERATED WITH INTERNAL CHARGER

No power cords to clutter up the service bay, improving portability.

INVERTED HYDRAULIC CYLINDER

The chrome piston rod is protected from debris and damage at all times extending the life of the product and substantially reducing maintenance costs.

AUTOMATIC STEERING SYSTEM


No need to manually pump the jacks up to move the columns in and out

FORKLIFT POCKETS ~

Relocate column in your shop with ease.

PATENTED CONTROL SYSTEM

No master/slave column - lift can be controlled from any column

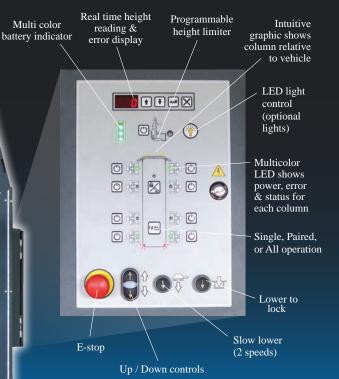


QUICK CONNECT CABLES

Lightweight, easy to connect and 33 feet long

HORSESHOE WIRING

While other mobile column lifts are connected by four cables, the wired FCH4 uses just three (forming a horseshoe), so the front or back of the lift is always open.



Shown: FCHU2F4001

œ.

USE THE LIFT ON ANY CONCRETE SURFACE



Mobile Column FCH4 is Gold Certified

Engineered to perform... Built to last! www.forwardLift.com

FCH4 FORMULE COLUMN ACCESSORIES



REDUCER SLEEVES

Steel reducer sleeves slide onto the forks to allow proper contact with smaller radius tires. (14" to 20" tires/ 356-508mm)

Shown: M140071

LED LIGHTING High-efficiency LED lighting with convenient,

single touch operation at the control panel provides hands-free lighting under the vehicle.




Shown: M140002

SPECIFICATIONS

| MOBILE LIFT | FCH4 | FCH6 | FCH8 |
|----------------------------------|--------------------------------------------|--------------|--------------|
| Column configuration | 4 | 6 | 8 |
| Capacity | 72,000 lbs. | 108,000 lbs. | 144,000 lbs. |
| Rise | 70" (1778 mm) | | |
| Lifting cycles | 12-14 per charge | | |
| Column width | 45.5" (1156 mm) | | |
| Column height | 102" (2590mm) | | |
| Height at full stroke | 144.75" (4464mm) | | |
| Tire Dimensions | 21" to 24" (533 - 610 mm) Truck road tires | | |
| Clearance from fork to column | 10" (254 mm) | | |
| Speed of rise | 78 seconds | | |
| Charging voltage | 110v-240v / 50/60Hz charger• | | |
| Battery type | NG - 24 to 27* | | |

Call factory for alternate voltage * Batteries not included - requires 2 per column



GET THE MOST FROM

YOUR LIFTING

SYSTEM!

LARGE WHEEL RISER KIT Larger tires are raised on ramps to allow for proper fork placement. Shown: M140030

JACK STANDS Available in 18,000 and 33,000 lbs. capacities with spring loaded caster wheels for easy positioning and portability.



18,000 lbs. capacity tripod stand



Shown: M140019

OPTIONAL WEIGHT GAUGE

Gauges approximate the weight being lifted by one column - turning pressure into weight.

Forward Lift 996 Industrial Drive Madison, IN 47250 Phone: 800.423.1722 Fax: 812.273.7329 www.forwardlift.com

Exclusive Mobile Column Controls / U.S. Patent No. 6,983,196

Lit# Forward FCH4_Mobile_Cutsheet_2012.05 (SUPERCEDES Forward FCH4_Mobile_Cutsheet_2011.12)

©2011 Forward Lift, Forward Lift is a brand of Vehicle Service Group, A Dover Company. All rights reserved. Unless otherwise indicated, Forward Lift, Vehicle Service Group, Dover and all other trademarks are property of Dover Corporation and its affiliates.